


205A-08020-ABC

air-cooled motor / generator with up to 14 kW continuous power

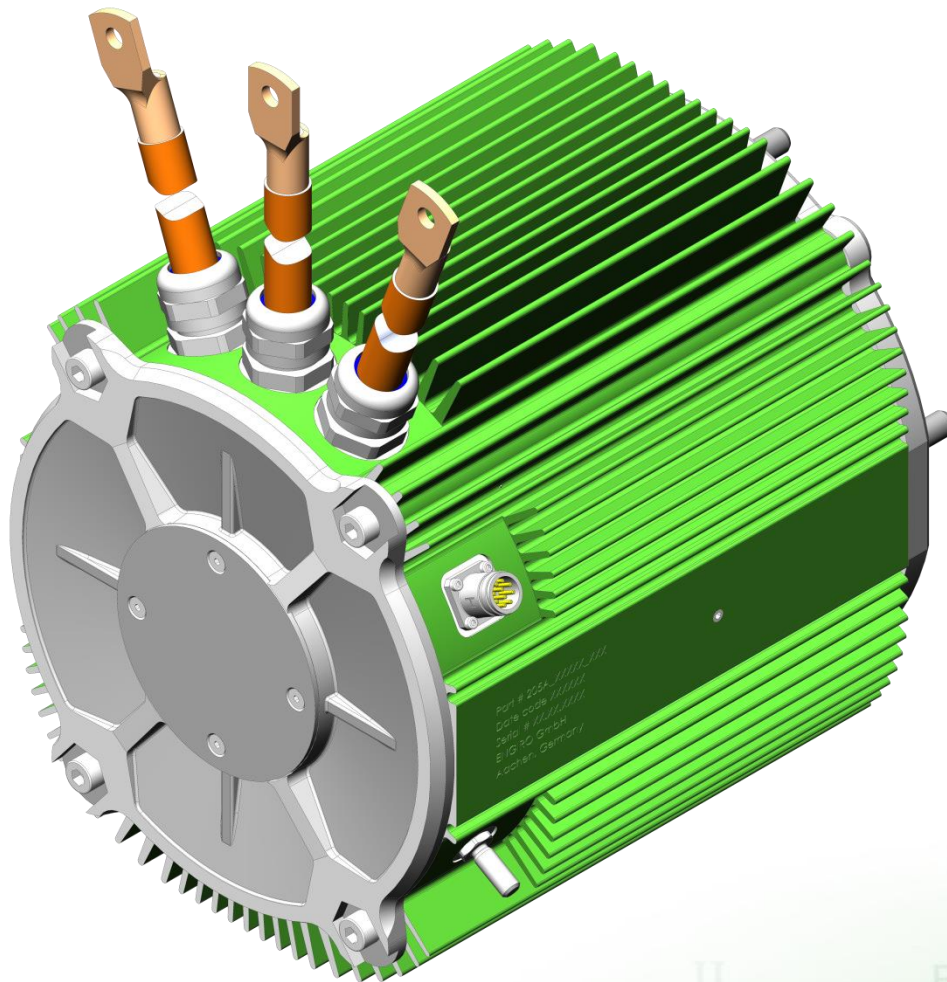

KEY FEATURES

- permanent magnet synchronous machine
- air-cooled
- high peak power for motor applications
- convincing cost-benefit ratio
- recommended voltage range from 48V to 200V
- delivery with controller possible

Section	Page
Technical Data Machine	3
Available Type Variants	4
Technical Drawings Machine	4
Characteristics Machine 48V	5
Characteristics Machine 96V	6
Characteristics Machine 140V	7

Data, including specifications, contained within this document are summary in nature and subject to change at any time without notice and are intended for general information only. Call for latest revision. All brand names and product names referenced are trademarks, registered trademarks, or trade names of their respective holders.

Nominal Operation (S1, cooling as specified below)				
Torque	T_{nom}	57	Nm	
Power	P_{nom}	14	kW	
Speed	n_{nom}	2250	rpm	
Phase rms-current	I_{nom}	159 ^{1,2)}	A	
Battery voltage (DC)	U_{nom}	96	V	
Electric frequency	$f_{el,nom}$	150	Hz	
Power factor	$\cos(\varphi)$	0.76		
Maximal Values (S2, 10s, cooling as specified below)				
Torque	T_{max}	201	Nm	
Power	P_{max}	32	kW	
Phase rms-current	I_{max}	625 ²⁾	A	
Battery voltage (DC)	U_{max}	200	V	
Speed	n_{max}	8000	rpm	
Electric frequency	$f_{el,max}$	533	Hz	
Electrical Data				
Number of phases		3		
Number of pole pairs		4		
Maximal efficiency		96	%	
T/I constant ($I < I_{nom}$)		0.36	Nm/A _{rms}	
U/n constant (AC) at a temperature of 30°C	rms:	22.8	peak:	38.8 V/(1000rpm)
K_e constant (AC) at a temperature of 30°C	rms:	0.054	peak:	0.093 V/(rad*s ⁻¹)
Additional Data				
Rotor moment of inertia		0.015	kg*m ²	
Protection category		IP6K9K ³⁾		
Maximal motor temperature		120	°C	
Allowed ambient temperature		-20 ... 45 ⁴⁾	°C	
Cooling (medium, flow rate, inlet temperature, pressure)		air, > 12 m/s, ≤ 25°C		
Temperature monitoring		1 x KTY84-130		
Type approval		CE, EN 60034		
Customs tariff number		8501 5230		
Connectors				
Power terminals		3 x 50mm ² cables with M8 cable lugs		
Weight power cables		3.3	kg	
Length power cables		2	m	
Signal connectors		M16, 10 Pin		


¹⁾ Nominal current strongly dependent on cooling as specified below. / ²⁾ The cables must not exceed a temperature of 140 °C at any time. Temperature and service life depend on the installation condition. / ³⁾ Please note that the IP6K9K rating is only valid if the machine is installed with suitable cable glands and an appropriate sealed interface at the drive side of the motor (flange and/or shaft). Please contact ENGIRO for further questions. / ⁴⁾ other range on request

Data, including specifications, contained within this document are summary in nature and subject to change at any time without notice and are intended for general information only. Call for latest revision. All brand names and product names referenced are trademarks, registered trademarks, or trade names of their respective holders.

Shaft and Flange Combinations for 205A-08020-ABC		Flange (A)
		S (Standard)
Shaft (B)	S (Cylinder shaft with keyway)	● (~32 kg)
	K (External splined shaft)	● (~32 kg)
Position Sensor (C)		E: Sin/cos encoder

Other individual combinations are also possible on request.


Technical Drawings

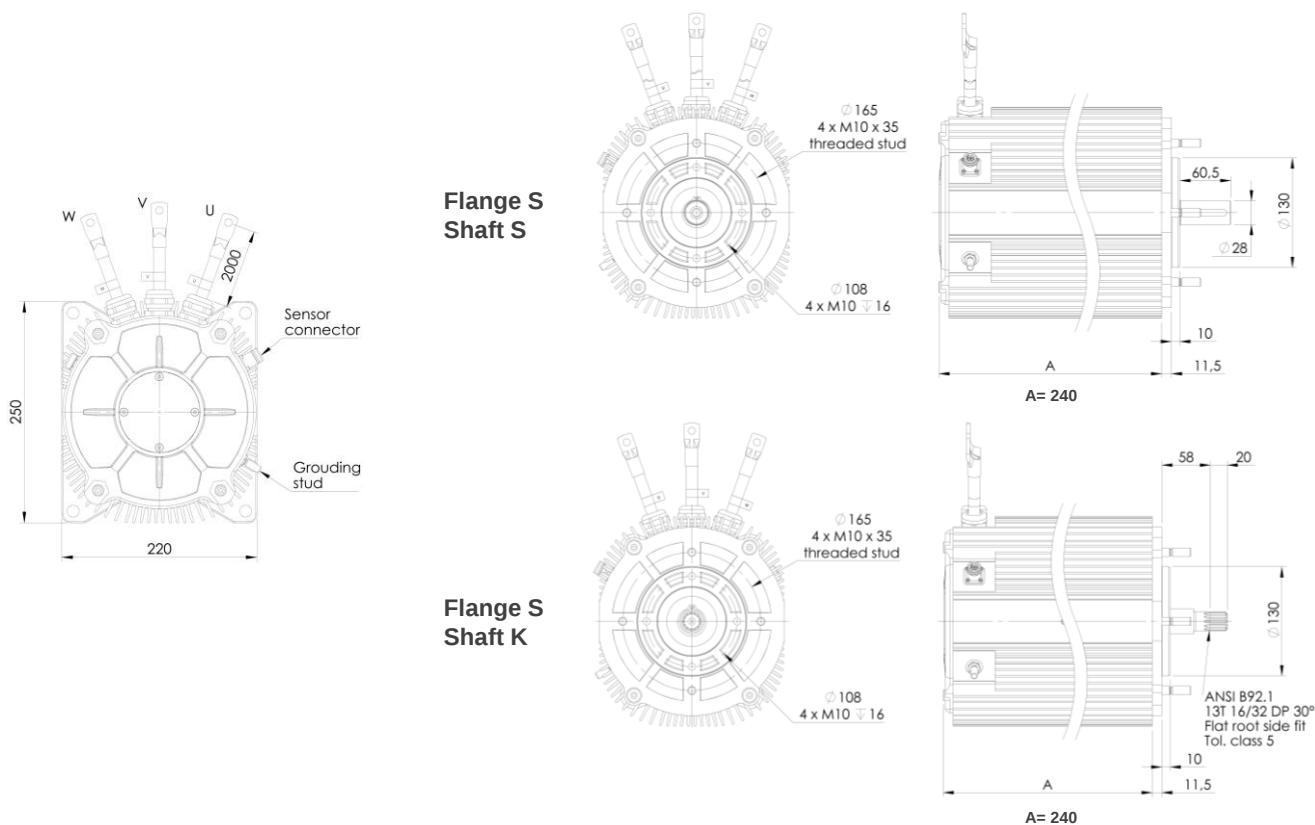

Data, including specifications, contained within this document are summary in nature and subject to change at any time without notice and are intended for general information only. Call for latest revision. All brand names and product names referenced are trademarks, registered trademarks, or trade names of their respective holders.

Simulated Efficiency of Motor Application


(electric machine only; $U_{nom} = 48 \text{ V}$; machine at 140°C ;))

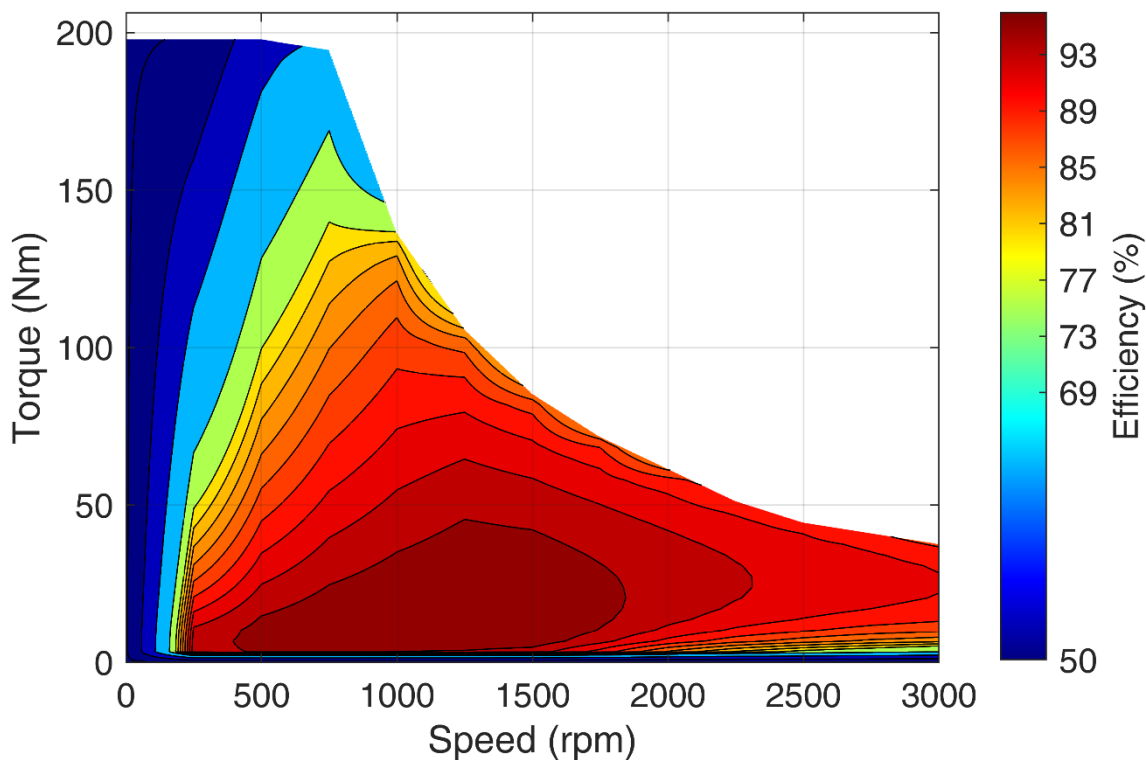

Simulated Characteristic Motor Parameters

$U_{nom} = 48 \text{ V}$


solid lines: continuous; dashed lines: maximum;

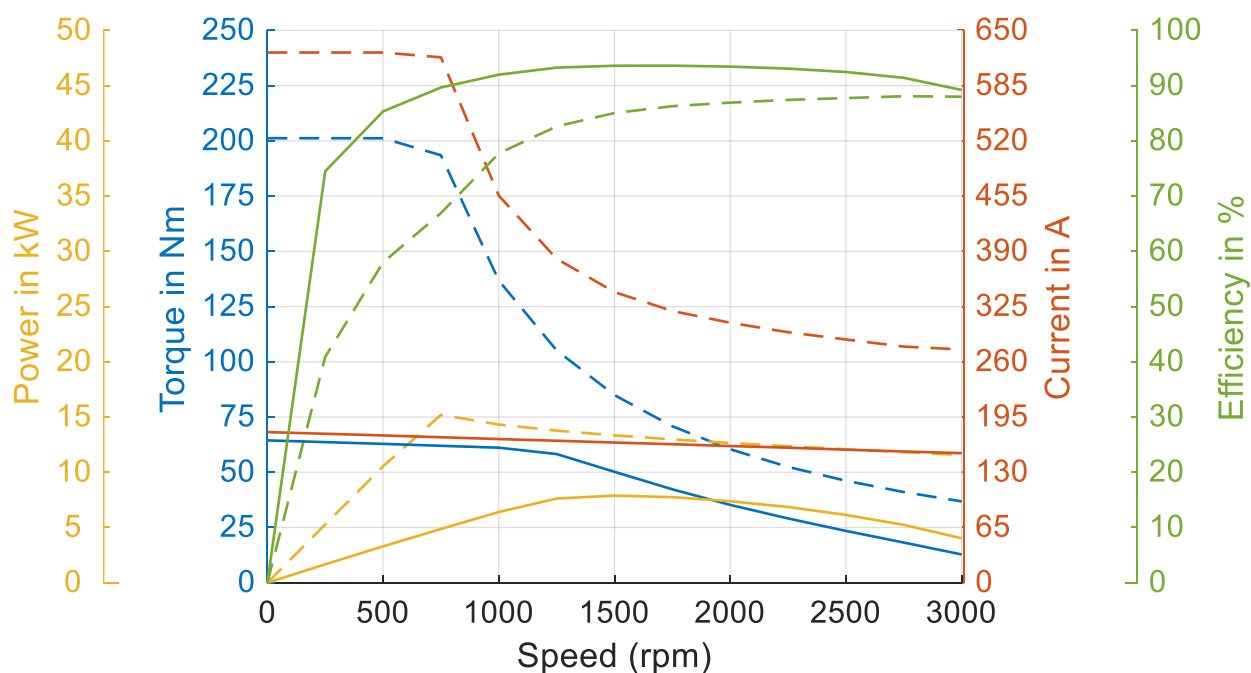

Data, including specifications, contained within this document are summary in nature and subject to change at any time without notice and are intended for general information only. Call for latest revision. All brand names and product names referenced are trademarks, registered trademarks, or trade names of their respective holders.

Simulated Efficiency of Motor Application


(electric machine only; $U_{nom} = 96 \text{ V}$; machine at $140 \text{ }^{\circ}\text{C}$;))

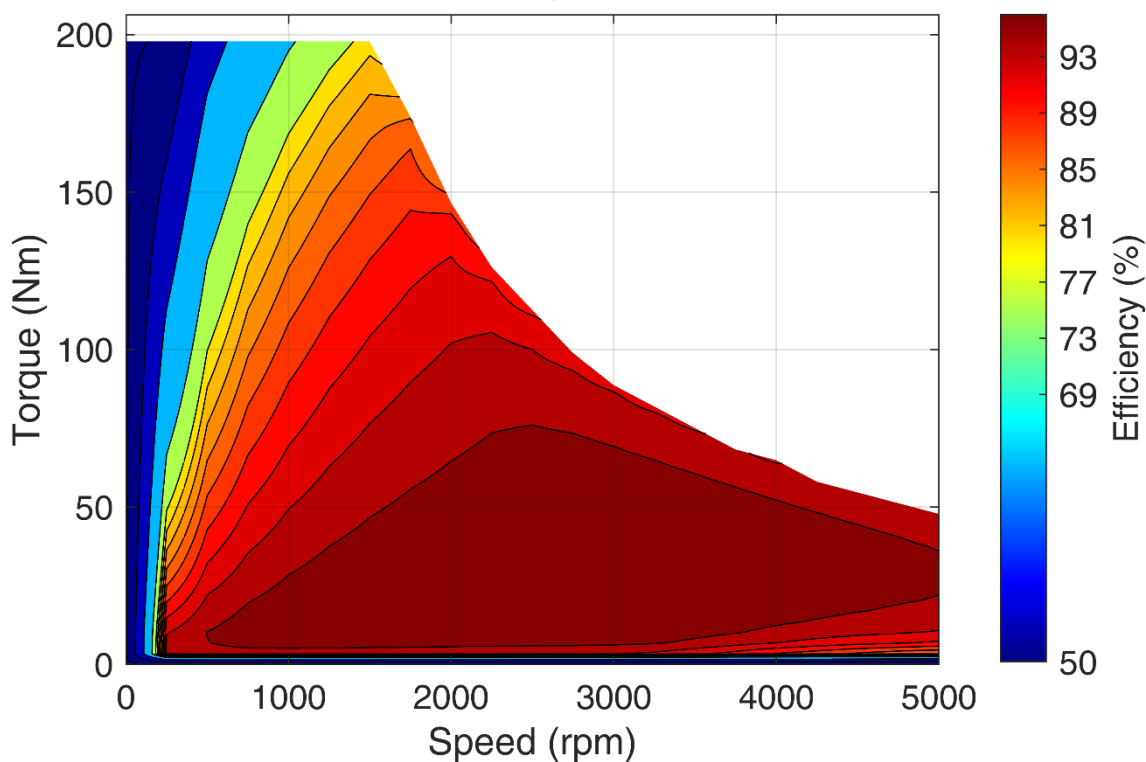



Simulated Characteristic Motor Parameters

$U_{nom} = 96 \text{ V}$

solid lines: continuous; dashed lines: maximum;

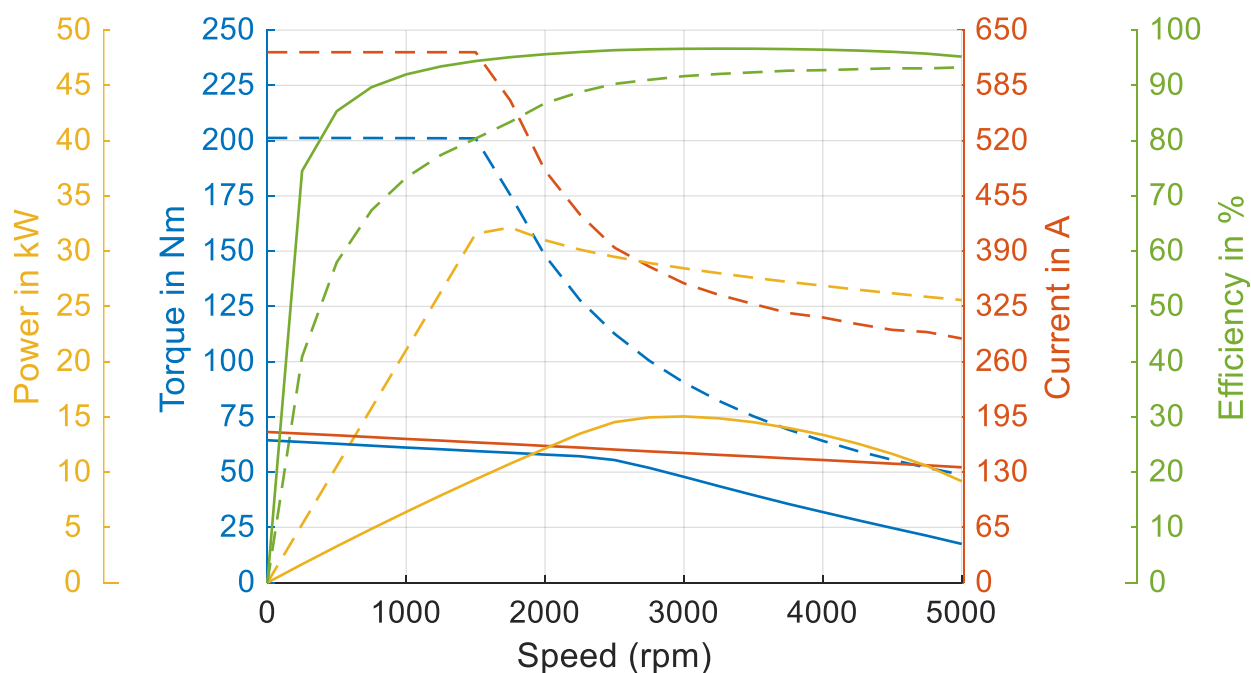

Data, including specifications, contained within this document are summary in nature and subject to change at any time without notice and are intended for general information only. Call for latest revision. All brand names and product names referenced are trademarks, registered trademarks, or trade names of their respective holders.

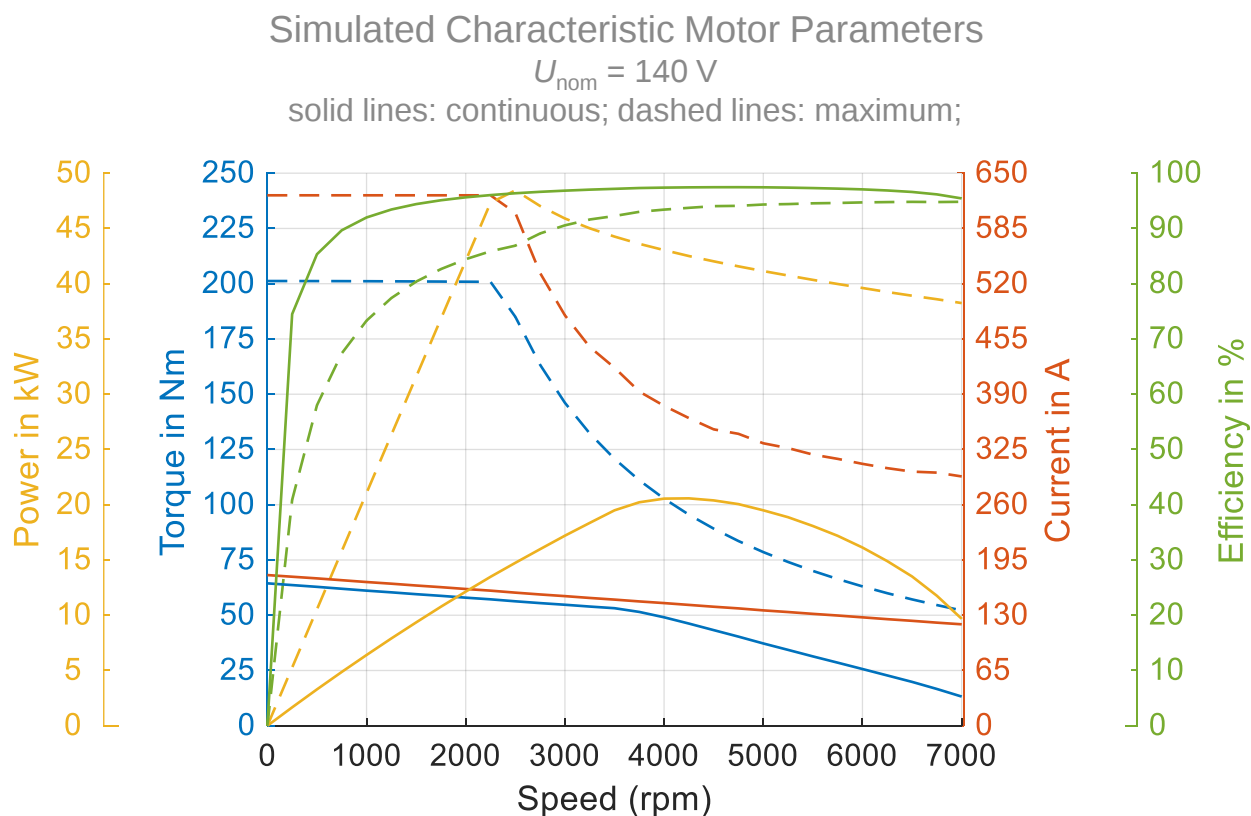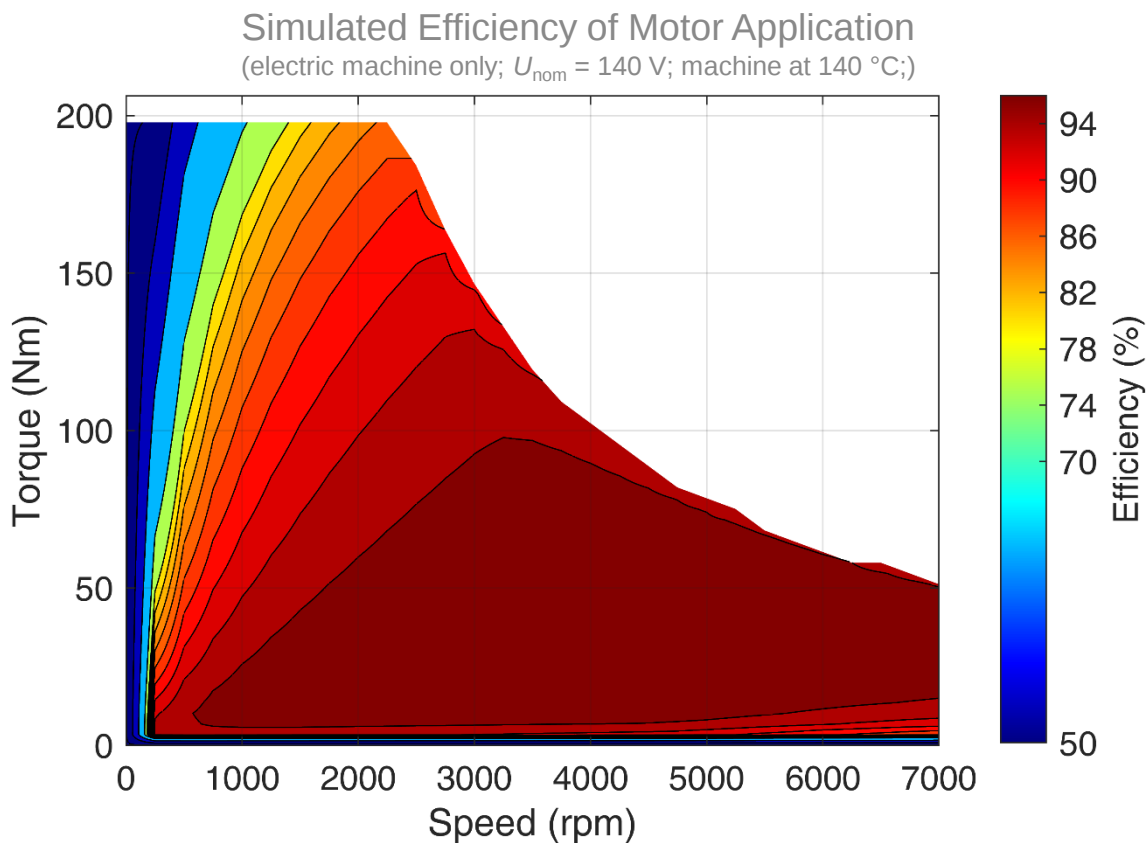

Data, including specifications, contained within this document are summary in nature and subject to change at any time without notice and are intended for general information only. Call for latest revision. All brand names and product names referenced are trademarks, registered trademarks, or trade names of their respective holders.